

WONDERFLOOR®
Vinyl Flooring

Sigma


*Flooring that combines durability,
style and performance*

Specialized flooring designed for healthcare / pharma industry.

The Wonderfloor SIGMA is a specialized flooring designed for healthcare / pharma industry and manufactured with a special process. It is flexible, resilient, PUR, antibacterial / fungicidal and easy to maintain. We recommend thermal welding for clean room applications.



PERFORMANCE CHARACTERISTICS		
CHARACTERISTICS	TEST METHOD	RESULT
TYPE OF FLOORING	EN 649	HARD WEARING, HOMOGENEOUS VINYL
DIMENSIONS (ROLLS)	EN 426	1.5 Mtr. X 20 Mtr.
OVERALL THICKNESS	EN 428	2.0 MM
WEAR LAYER THICKNESS	EN 429	2.0 MM
PUR		YES
DIMENSION STABILITY	EN 434	≤ 0.4%
RESIDUAL INDENTATION	EN 433	APPROX 0.09 MM
ABRASION RESISTANCE	EN 660-2	GROUP P
FLEXIBILITY	EN 435	10 MM MANDREL TEST-PASS
CASTOR CHAIR TEST	EN 425	SUITABLE
IMPACT SOUND RESISTANCE	ISO 140-8	APPROX + 5DB
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
FIRE PROPAGATION	BS 476 PART 6	CLASS 0
RESISTANCE TO CHEMICALS	EN 423	NO VISIBLE CHANGE
CLASSIFICATION	EN 685	33, 34
ELECTRICAL RESISTANCE	EN 1081	1010 Ohms
MICROBES	GERMIDOX-afb PROCESS TO INHIBIT MICROBIAL GROWTH	
HYGIENE	INDEPENDENT TESTS RESULTS HAVE PROVED SIGMA TO BE EFFECTIVE IN INHIBITING MICROBIAL GROWTH	

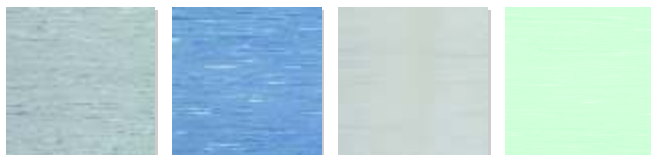

WONDERFLOOR- the world class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2008 system approved company. We are the largest manufacturer & exporter for PVC floor coverings, films, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in the state-of-the art plant & machinery equipped with latest technology and optimum quality control. We have a wide range of distribution network.

MAINTENANCE

- Do's :
- After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution
 - Prevent point load indentation by covering your furniture legs with rubber stopper caps.
 - To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool (No. 00 or 000) soaked in a warm soap solution.
 - Scuff marks on the floor can be removed with little application of diesel.
 - Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor Vinyl Flooring.
 - Use water to remove any chemical spill on flooring.
- Don'ts :
- Do not use any strong detergent, harsh cleaning agent and dry steel wool.
 - Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn-marks on the floor.
 - Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional / bulk enquiries, please e-mail : mkt@rmgpoly.com, or call : 9711200510
For export enquiries, please e-mail : info@rmgpoly.com Call: 98731 38885

All products as per EN standards



RMG POLYVINYL INDIA LIMITED

Registered Office : 302, IIIrd floor, Elite House, 36, Community Centre, Kailash Colony Extn., Zamrudpur, New Delhi-110048,
Tel.: 0120-3118801/32118802, Fax: 011-66173679, E-mail: info@rmgpoly.com

Regional Offices : • Ahmedabad: 9377262959 • Bangalore: 9341263704 • Bhubaneswar: 9337423999 • Chandigarh: 93160 008724 • Chennai: 9380353335
• Cochin: 9387233952 • Guwahati: 9864016200 • Hyderabad: 9391051138 • Indore: 9329359269 • Kolkata: 9331023016
• Mumbai: 9323675979 • New Delhi: 011-41632022/24 • Pune: 9890096161 • Raipur: 9770683216

www.rmgpoly.com, www.wonderfloor.com

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited