

**WONDERFLOOR®**  
Vinyl Flooring

*Wallpro*


*Flooring that combines durability,  
style and performance*

## Anti microbial /impact resistant flexible wall cladding

The Wonderfloor WALLPRO is anti microbial, impact resistant flexible wall cladding. The integration of floor and wall with thermal welding is ideal for maintaining clean room conditions and helps in reducing the spread of germs and dust. It is easy to clean and available in cool pastel shades.



PERFORMANCE CHARACTERISTICS		
CHARACTERISTICS	TEST METHOD	RESULT
TYPE OF WALL CLADDING	EN 649	FLEXIBLE WALL COVERING
DIMENSIONS (ROLLS)	EN 426	1.5 Mtr. X 20 Mtr.
COVERAGE		30 SQ Mtr.
OVERALL THICKNESS	EN 428	1.0 MM
PUR		YES
DIMENSION STABILITY	EN 434	≤ 0.4%
RESIDUAL INDENTATION	EN 433	APPROX 0.09 MM
ABRASION RESISTANCE	EN 660-2	GROUP M
FLEXIBILITY	EN 435	NO CRAKING
CASTOR CHAIR TEST	EN 425	SUITABLE
IMPACT SOUND RESISTANCE	ISO 140-8	APPROX + 2DB
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
RESISTANCE TO CHEMICALS	EN 423	NO VISIBLE CHANGE
ELECTRICAL RESISTANCE	EN 1081	10 <sup>10</sup> Ohms
MICROBES	GERMIDOX-afb PROCESS TO INHIBIT MICROBIAL GROWTH	
HYGIENE	INDEPENDENT TESTS RESULTS HAVE PROVED WALLPRO TO BE EFFECTIVE IN INHIBITING MICROBIAL GROWTH	

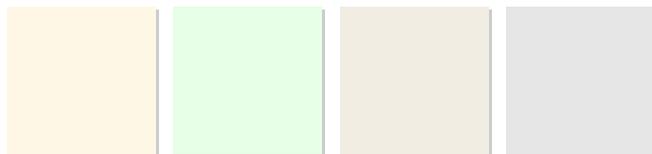

WONDERFLOOR- the world class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2008 system approved company. We are the largest manufacturer & exporter for PVC floor coverings, films, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in the state-of-the art plant & machinery equipped with latest technology and optimum quality control. We have a wide range of distribution network.

#### MAINTENANCE

- Do's :
- After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution
  - Prevent point load indentation by covering your furniture legs with rubber stopper caps.
  - To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool (No. 00 or 000) soaked in a warm soap solution.
  - Scuff marks on the floor can be removed with little application of diesel.
  - Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor Vinyl Flooring.
  - Use water to remove any chemical spill on flooring.
- Don'ts :
- Do not use any strong detergent, harsh cleaning agent and dry steel wool.
  - Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn-marks on the floor.
  - Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional / bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com), or call : 9711200510  
For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com) Call: 98731 38885

All products as per EN standards



### RMG POLYVINYL INDIA LIMITED

Registered Office : 302, IIIrd floor, Elite House, 36, Community Centre, Kailash Colony Extn., Zamrudpur, New Delhi-110048,  
Tel.: 0120-3118801/32118802, Fax: 011-66173679, E-mail: [info@rmgpoly.com](mailto:info@rmgpoly.com)

Regional Offices : • Ahmedabad: 9377262959 • Bangalore: 9341263704 • Bhubaneswar: 9337423999 • Chandigarh: 93160 008724 • Chennai: 9380353335  
• Cochin: 9387233952 • Guwahati: 9864016200 • Hyderabad: 9391051138 • Indore: 9329359269 • Kolkata: 9331023016  
• Mumbai: 9323675979 • New Delhi: 011-41632022/24 • Pune: 9890096161 • Raipur: 9770683216

[www.rmgpoly.com](http://www.rmgpoly.com), [www.wonderfloor.com](http://www.wonderfloor.com)

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited